


MLS-AT-3OLED-1 & 2


includes

IC/AT Housing, Flush Access Panel, 30 Watt LED Projector, and Gimbal Mounting

Recessed Housings
12.5" Wide x 9.4" Tall x 27" Length

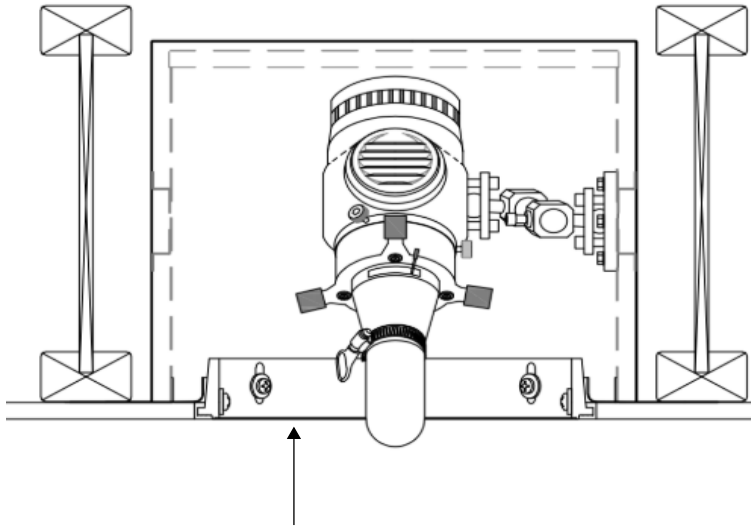


Ceiling Finish Version 1
10" Round Flush Removable Access Cover

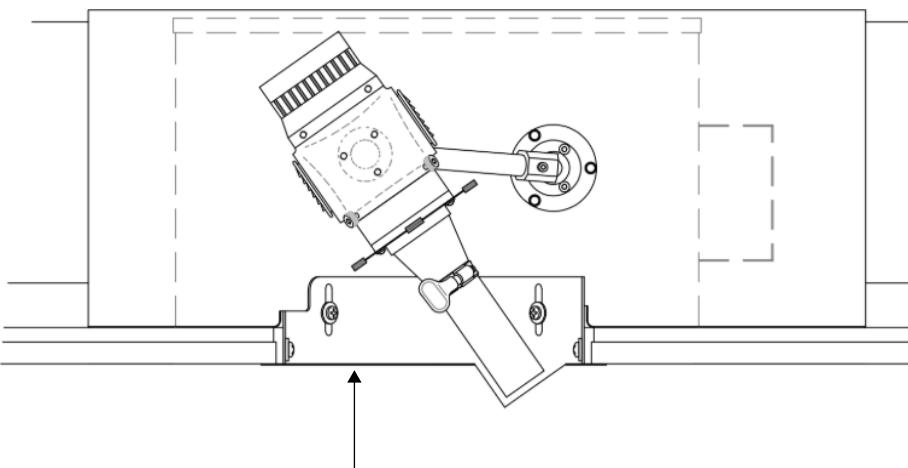

Ceiling Finish Version 2
12" Round Overlap Removable Access Cover

Projector Specification

Description	Merlin Light ® Precision optical framing projector
	
Catalog #	MLS-AT-3OLED-1 & 2
Rating	Insulation Contact and Airtight rated per UL 1598 and ASTM E283-04
Housing	20 Gauge, powder coated, shallow steel. Installed by qualified electrician. Orientate driver toward Art Work.
Magnetic Ceiling Access Panel Covers with built in Glare Shield	
Version 1- 10" Flush with finished ceiling primed finish. Paint to match.	
Version 2- 12" Overlap on finished ceiling primed finish. Paint to match.	
Lamp and Driver Set	30 Watt LED 3000k Heat Sink, Active Cooling and Built-in Reflector. 120/277 VAC dimmable phase and 0-10 volt connectivity. Available dichroic filters, 2700,3500
Projector P1	Cast aluminum body with black anodized finish. Projector will be supplied and installed by a GlennCo Inc. or factory certified technician. Installer will make final installation and confinement on art object being illuminated.
Mounting M1	Gimbal Mount and strap
Lens	Objective lens selected by installation technician.



6415 N. Business Park Loop Rd. Ste K
Park City, Utah 84098
Phone: (435) 602-5801
www.merlinlights.com

*Copyright Protected, GlennCo Inc. 2025

