

ML-AT-70C-1

includes

IC/AT Housing, Flush Access Panel, 70W CMH Projector, and Gimbal Mounting

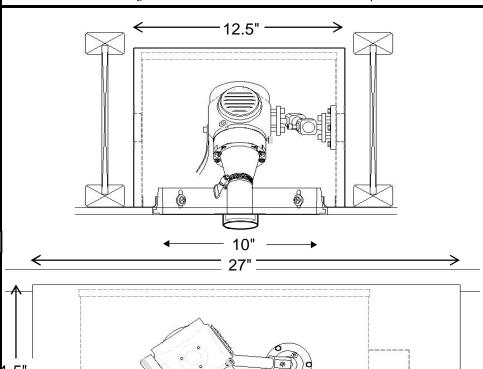

Removable Magnetized Flush with Finished Ceiling Cover Plate - Paint to Match

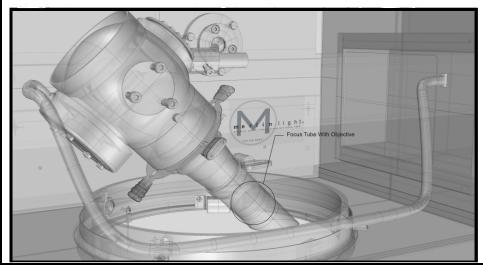

Mounting	
Proje	ector Specifications
Description	Merlin Light® Precision
c USTED US	optical framing projector
Catalog #	ML-AT-70C-1
Rating	Insulation Contact and
	Airtite rated per UL 1598
	and ASTM E283-04
Housing	20 Gage, powder coated,
НОЈ-Н2	steel. Installed by qualified
	electrician. Orientate
	ballast toward Art Work.
Access Panel	Flush access panel. Cast
A1	aluminum mud ring for
	plaster or drywall, with 10"
	flush, white primer cover
	plate. Offset hole.
Lamp and	70 Watt Ceramic Metal
Ballast	Halide Lamp and 70W,
L2	120/277 VAC electronic
	ballast, non-dimmable.
	Time delay on hot restart.
Projector	Cast aluminum body with
P1	black anodize finish.
	Projector will be supplied
	and installed by a GlennCo
	Inc. or factory certified
	technician. Installer will
	make final installation and
	confinement on art object
	being illuminated.
Mounting	Gimbal Mount and strap
M1	
Lens	Objective lens selected by
1	







installation technician.